

## Standard Configurations

- Overload Sensor and Alarm
- Tilt/Slope Sensors and Alarm
- Self-closing/Self-catching Gate
- Higher Platform Rails (Foldable)
- Solid Non-marking Tires
- Swing-out Component Trays
- Descent Protection and Alarm
- Flashing Beacons (Both Sides)
- Pothole Protectors
- Universal Control Box
- Quick Disconnect for Control Box
- Foot Pedal Extended Platform
- Proportional Control
- Lanyard Points
- Manual Brake Release
- Emergency Descent
- Horn and Hour Meter
- Full Height Drive
- Intelligent Diagnostic System
- AC Platform Power (GFCI)
- Charging Protection System
- Wind Rating Stickers
- LED Battery Charging Indicator

# ANSI A92.20 Slab Scissor Lifts

# LGMG

LGMG North America Inc.



# ELECTRIC MOTOR DRIVE


## AS2646E Scissor Lift (Indoor/Outdoor)

- Optimized to deliver longer-lasting performance for jobs that are inside and outside
- Battery-powered with zero emissions means it is environmentally friendly and great for indoor use
- A superior electronic control system that allows for better braking abilities on long downhill
- Improved steering mechanism reduces tire wear during turning



### Product Specifications AS2646E

Platform Capacity	990 lbs
Platform Occupants (Indoor/Outdoor)	2/1
Platform Height	26'
Machine Length	8'
Machine Width	3' 11"
Machine Height (Rails Up)	7' 6"
Machine Height (Rails Down)	5' 8"
Platform Extension	3'
Deck Extension Capacity	265 lbs
Drive Speed (Lowered)	2.5 Mph
Drive Speed (Elevated)	0.5 Mph
Lift Time	35 Secs
Lower Time	40 Secs
Gradeability	25%
Max Slope/Tilt	1.5°/3°
Amp Hours	(4) 6V x 240Ah
Maximum Ground Bearing Pressure	172 PSI
Tire Size	15" x 5"
Ground Clearance	3' 9"
Machine Weight	5,986 lbs

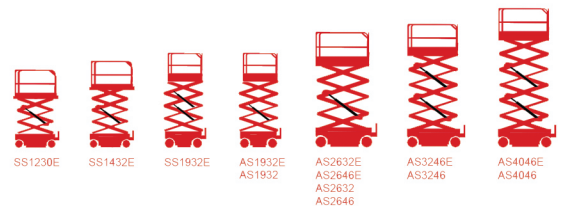

ANSI A92.20 Compliant



## LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201  
Email: [sales@lmgna.com](mailto:sales@lmgna.com)

Local Sales Contact: