# **EZG7 MIXER® 7ft³(0.19m³)**

# Mixing Station Owner's Manual



EZG Manufacturing 405 Watertown Road Waterford, Ohio 45786 (740) 749-3512 or 1-800-417-9272 Fax (740) 962-2037 www.ezgmfg.com

# TABLE OF CONTENTS

INTRODUCTION	3
ABOUT THIS MANUAL	3
GENERAL INFORMATION	3
SAFETY INFORMATION	3
SAFETY PRECAUTIONS	4-5
CALIFORNIA PROPOSITION 65 WARNING	6
SETUP INSTRUCTIONS	6
OPERATING INSTRUCTIONS	7
DAILY MAINTENANCE	7
OBTAINING SPARE PARTS	8
CLEANUP	8
SERVICE RECORDS	8
WARNING LABELS AND LOCATIONS	9
FRAME ASSEMBLY	10
DRUM & PADDLE ASSEMBLY	11
DRIVE ASSEMBLY.	12
GREASE FITTING LOCATION	13
AXLE & HUB ASSEMBLIES	14
SHAFT ASSEMBLY.	15
SEAL KIT	16
OPTIONS	17
NOTES	18
WARRANTY	19
WARRANTY REGISTRATION	20

### INTRODUCTION

Congratulations on purchasing one of the finest pieces of masonry equipment on the market today! If this is your first EZG Manufacturing product, you will not be disappointed. If you have previously owned an EZG Manufacturing product you will find the same high quality and dependability that you have come to expect from EZG Manufacturing.

# **ABOUT THIS MANUAL**

The purpose of this manual is to inform the owner/employer/and the operator, how to safely operate this piece of equipment, and make them aware of any hazards. It also contains important information regarding assembly, set up, operation, and maintenance. It is the Owner/Employers responsibility to make sure that anyone who operates this machine understands all safety warnings. If you do not understand any items in this manual, please contact the dealer where this product was purchased, or the manufacturer at the number listed throughout this manual. If you have any suggestions about how to make this manual easier to understand, contact the manufacturer. Keep this manual available for reference wherever this piece of equipment is being used and make it available to any operators.

## GENERAL INFORMATION

Illustrations in this manual may show details or components that may not be the same as your machine. Continuing improvements to the design of this machine may have caused changes that are not included in this manual. The information in this document is subject to change without notice.

# **SAFETY INFORMATION**

The following safety symbols and signal words will be used throughout this manual and on the product, for your safety and the safety of others, please become familiar with their meaning and heed their warnings.

	î	\
L	•	7

This symbol, either used alone or with a signal word, is used to call your attention to instructions involving your safety and/or the safety of others. Failure to follow these instructions will likely result in personal injury or death.



This signal word is used to identify a hazard which, if not avoided, will result in death or serious injury.



This signal word is used to identify a hazard which, if not avoided, could result in death or serious injury.



This signal word is used to identify a hazard which, if not avoided, could result in minor or moderate injury.

NOTICE

This signal word is used to identify a hazard which, if not avoided, could result in property or equipment damage. It also may be used for special instructions related to performance, maintenance or general items.

### **SAFETY PRECAUTIONS**



### WARNING

# Failure to obey the following safety instructions could result in DEATH or SERIOUS INJURY.

Read and understand entire manual before operating the EZG7 Mixer®

For your safety and the safety of others, replace any missing or damaged warning decals by contacting the manufacturer at 1-800-417-9272.

Make sure anyone operating the EZG7 Mixer® is thoroughly familiar with its operation. Keep all unauthorized and untrained personnel, especially children away from EZG7 Mixer®.

Never operate machine with safety grate, guards or safety devices removed or open. Do not alter any safety guards.

Stay clear of mixing paddles while machine is running. Keep all body parts, clothing, jewelry and solid objects away from all moving parts.

Never perform any work on the EZG7 Mixer® while it is running. Before working on or cleaning the EZG7 Mixer®, shut off engine and disconnect spark plug wire.

Never operate the EZG7 Mixer® under the influence of alcohol, drugs, or medications.

This EZG7 Mixer® has been designed and built as a material mixing station, and should not be used for anything other than its intended purpose.

Model	Empty Weight	Max Gross Weight
EZG7	820 Lbs.(371.9 kg)	1870 lbs.(848.2 kg)

Do not exceed Maximum Gross Weight

Never stand under an elevated EZG7 Mixer®.

Stay clear of moving parts while machine is in operation.

When towing, refer to vehicle manufactures specs to insure load capacity is not exceeded.

Always check axle, tires, and safety chains before towing EZG7 Mixer®.

Always cross and connect safety chains before towing EZG7 Mixer®.

Never attempt to ride the EZG7 Mixer®.

### **SAFETY PRECAUTIONS**



### **№ WARNINGS** continued

Operate only in properly vented environments. The mixer requires a free flow of air and emits carbon monoxide gas.

Avoid breathing dust produced while using the EZG7 Mixer®. Dust may contain crystalline silica and may cause serious health problems.

Do not operate near combustible materials.

Do not smoke around EZG7 Mixer®.

Always know the location of nearest fire extinguishers, first aid kit, and emergency personnel phone numbers in case of emergency.



### **CAUTION**

# Failure to obey the following safety instructions could result in MINOR or MODERATE INJURY.

Inspect all hoses, fasteners, bolts and welds for nicks, cracks, cuts, damage, wear or looseness before each use. Repair as needed.

Always wear approved PPE, including glasses, hearing protection, hard hats, and ventilation masks when operating a EZG7 Mixer®.

Do not use the EZG7 Mixer® as a lifting device or with accessories or attachments not recommended by EZG Manufacturing, as damage to equipment or operator might result.

Avoid contact with hot hydraulic fluid.

Allow system to cool before performing any repairs or service, such as adding fuel or oil.

### **NOTICE**

Use only factory authorized parts.

Used Lubricants such as engine and hydraulic oil, and hazardous waste must be taken to an authorized disposal or recycling center.

Consult Honda® owners's manual for engine maintenance and warnings.

# California - Proposition 65 Warning

Engine exhaust and some of its constituents, and some dust created by power sanding, sawing, grinding, drilling, and other construction activities contains chemicals known to the State of California to cause cancer, birth defects and other reproductive harm. Some examples of these chemicals are:

Lead from lead based paints - Crystalline silica from bricks -Cement and other masonry products -Arsenic and chromium from chemically treated lumber

Your risk from these exposures varies, depending on how often you do this type of work. To reduce your exposure to these chemicals: ALWAYS work in a well ventilated area, and work with approved safety equipment, such as dust masks that are specially designed to filter out microscopic particles.

# **SETUP INSTRUCTIONS**

Before operating the EZG7 Mixer® it should be properly set up on the jobsite. The EZG7 Mixer® may be lifted by using a forklift. The EZG7 weighs 820 lbs.(371.9 kg) empty and 1870 lbs.(848.2 kg) full. Check forklift ratings before attempting to move the EZG7 Mixer®.

The EZG7 Mixer® is equipped with (2) wheels and a tow tongue.

- 1. Position the EZG7 Mixer® at point of operation.
- 2. Disconnect EZG7 Mixer® from towing vehicle.
- 3. Lower tongue until mixer is level.
- 4. Verify that the mixer foot is touching the ground and that the EZG7 Mixer® is level and cannot rock in any direction.
- 5. Perform the daily maintenance as described in the "Daily Maintenance" section of this manual.

EZG Manufacturing 1-800-417-9272 www.ezgmfg.com Revision Number-003 04-25-2017 - Present

# **OPERATING INSTRUCTIONS**



Warning! This equipment is to be operated by trained and qualified personnel over the age of 18. Death or serious injury can result.

- 1. Slide forks under the EZG7 Mixer® and place in desired location.
- 2. Level unit and chock wheels.
- 3. Start engine.

See engine manuals for proper procedure.

4. Fill with material, add water and mix to desired consistency and dump.

*NOTE:* In the unlikely event that the mixing paddles plug, momentarily reverse the paddles.



Warning! NEVER put your hands inside mixer drum while equipment is running. Death or serious injury can result.

# **DAILY MAINTENANCE**



Warning! Before performing any described maintenance items, make sure engine is turned off and spark plug wire is disconnected. Death or serious injury can result.

- 1. Check engine oil daily.
- 2. For engine maintenance, refer to the engine manufacturer's manual furnished with the EZG7 Mixer®.
- 3. Check and grease all grease fittings. (Grease fitting location can be found on the Grease Fitting Location drawing in this manual)
- 4. For maximum performance, thoroughly clean inside and out at mid-day or lunch break and again at the end of each day's use. Do not allow a buildup of material to form on the blades and seals.
- 6. Check equipment for leaks. Fix any leaks before operating the EZG7 Mixer®.
- 7. Check all welds and bolts. If a cracked weld is found, do not operate the EZG7 Mixer® until repaired by qualified personnel. Tighten any loose bolts.
- 8. Check Paddle Shaft Seal for excessive wear. If any mortar or concrete is leaking past the seal, change the seals immediately.
- 9. Check paddle rubbers for wear. Adjust or replace as needed.

# **OBTAINING SPARE PARTS**

Spare parts for your EZG7 Mixer® may be obtained by the following procedure:

- 1. Record the information from the serial number tag located on the frame near the hydraulic reservoir.
- 2. Using the parts reference table in this manual, record the part number or component.
- 3. Contact your local EZG7 Mixer® dealer or EZG Manufacturing at 1-800-417-9272 with the information recorded.

# **CLEANUP**


- 1. Turn off engine and disconnect spark plug wire.
- 2. For maximum performance, thoroughly clean inside and out at mid-day or lunch break and again at the end of each day's use. Do not allow a buildup of materials to form on the blades and seals.
- 3. Hose out and brush down mixing drum, then spray and brush paddles until all excess material is removed.
- 4. Grease the fittings and brush the face of drum seals until clean.

# SERVICE RECORDS


SERVICE PERFORMED	DATE	INITIALS

EZG Manufacturing 1-800-417-9272 www.ezgmfg.com Revision Number-003 04-25-2017 - Present

# WARNING LABELS AND LOCATIONS

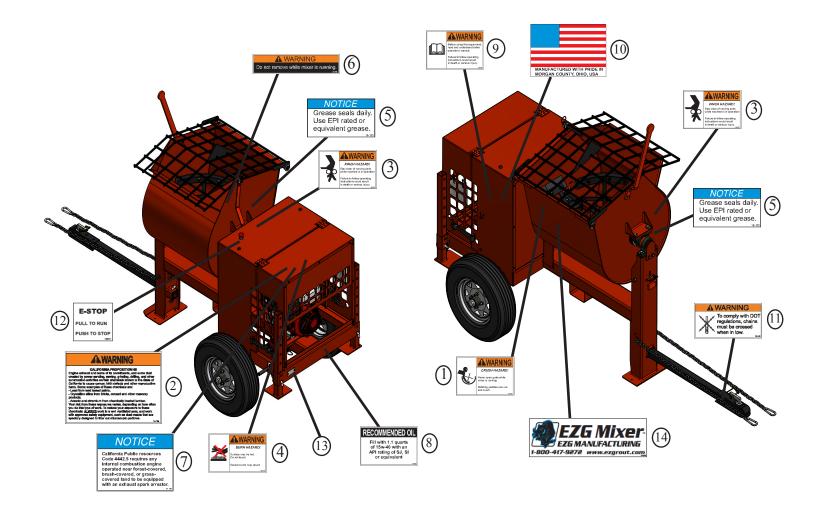


ITEM	PART NUMBER	DESCRIPTION	QTY
A	16-213	EZG7 Decal Kit	1
1		Never Open Grate Decal	1
2		Proposition 65 Decal	1
3		Small Pinch Point Decal	2
4		Hot Surface Decal	1
5		Grease Seals Daily Decal	2
6		Do Not Remove Decal	1
7		California Public Resources Decal	1
8		Fill with 1.1 Quart Decal	1
9		Read Owners Manual Decal	1
10		U.S. Flag Decal	1
11		DOT Cross Chains Decal	1
12		E-STOP Label	1
13		Serial Tag Location	1
14		EZG Mixer Decal	1

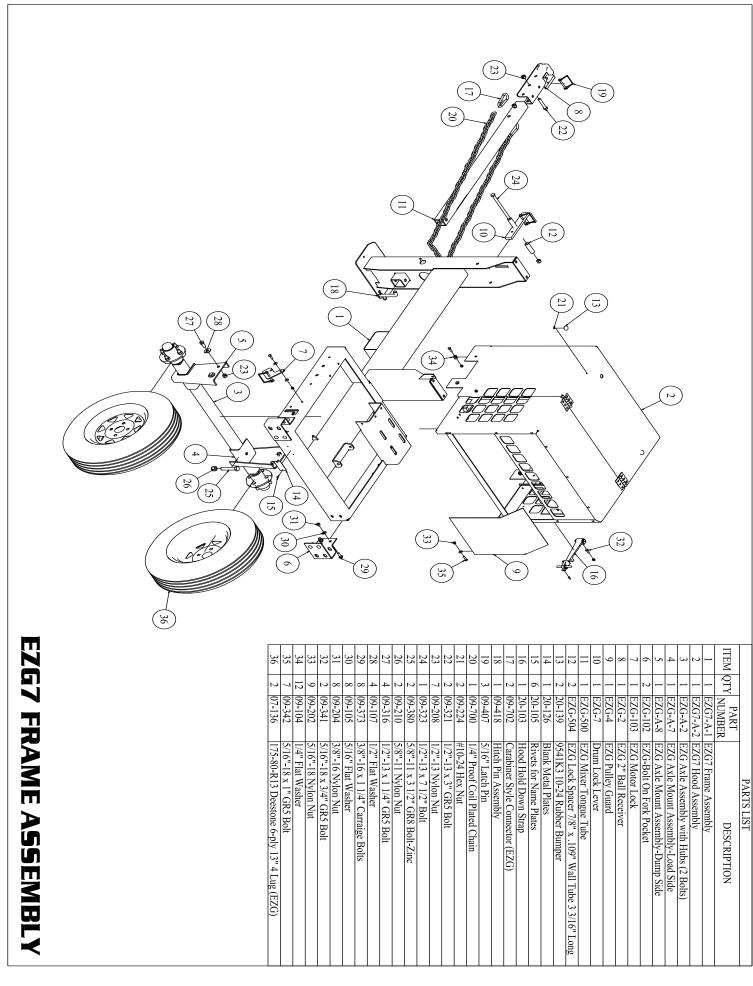


**EZG Manufacturing** 

1-800-417-9272

www.ezgmfg.com

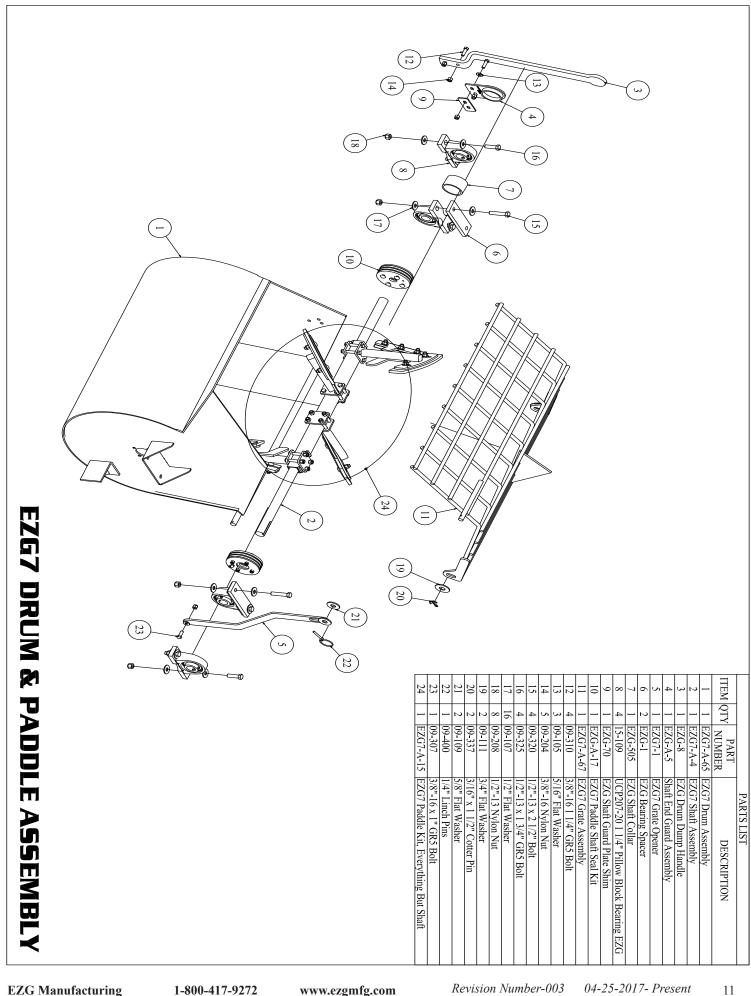


Revision Number-003 04-25-2017- Present **EZG Manufacturing** 1-800-417-9272 www.ezgmfg.com

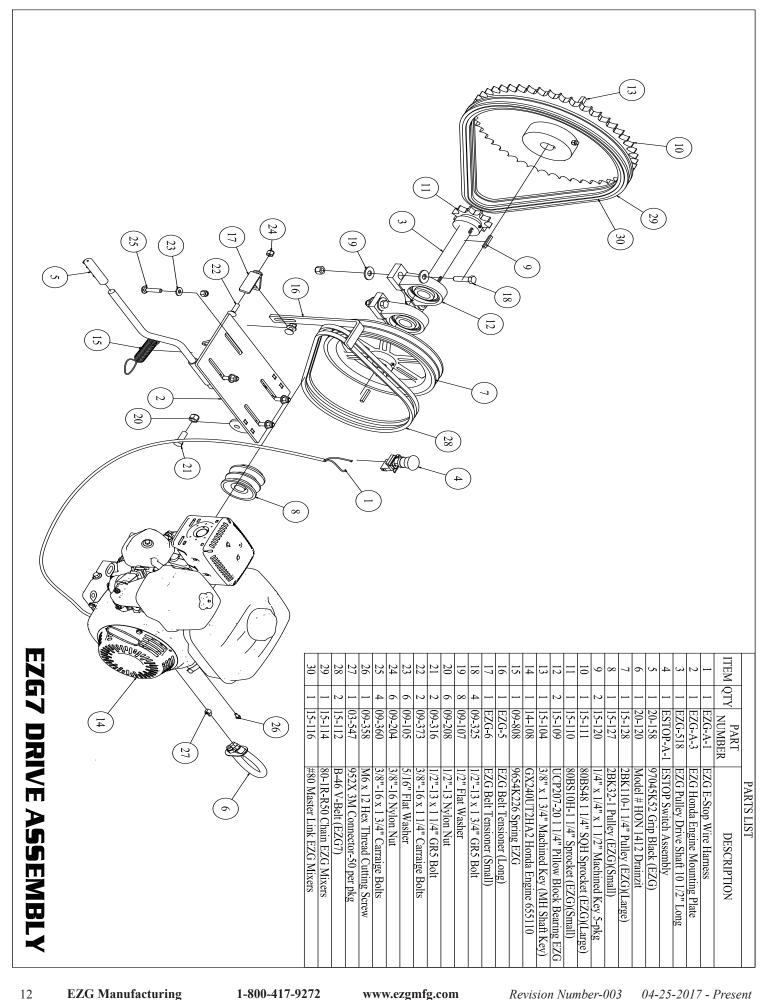

**EZG** Manufacturing 1-800-417-9272 www.ezgmfg.com 04-25-2017 - Present Revision Number-003


# **GREASE FITTING LOCATIONS**

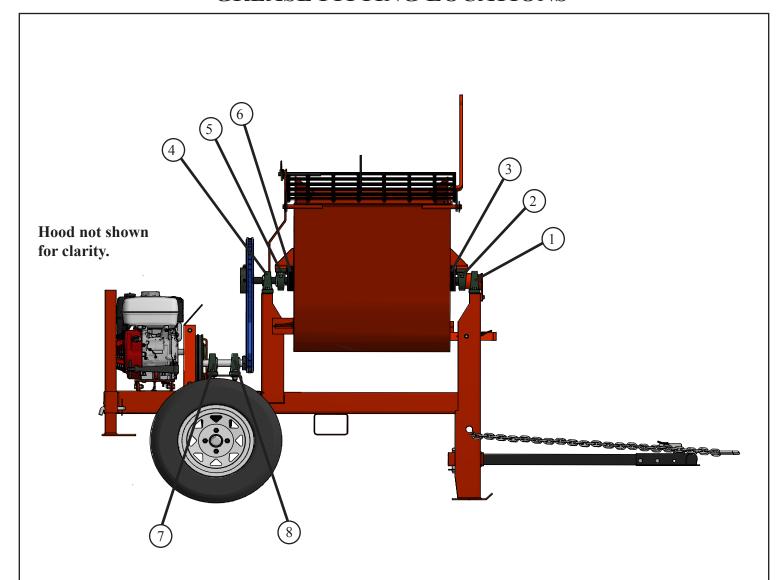


<b>ITEM</b>	<b>DESCRIPTION</b>
1	BEARING
2	BEARING
3	SHAFT SEAL
4	BEARING
5	BEARING
6	SHAFT SEAL
7	BEARING
8	BEARING


NOTE: Check ALL grease fittings daily. Grease as needed.


Revision Number-003 04-25-2017- Present

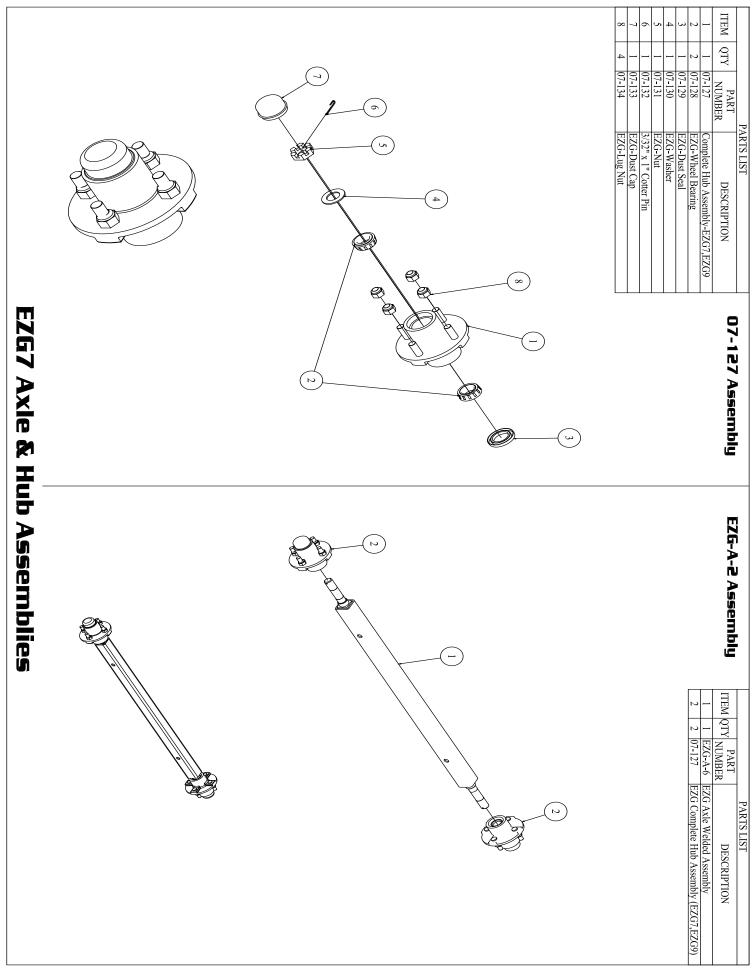

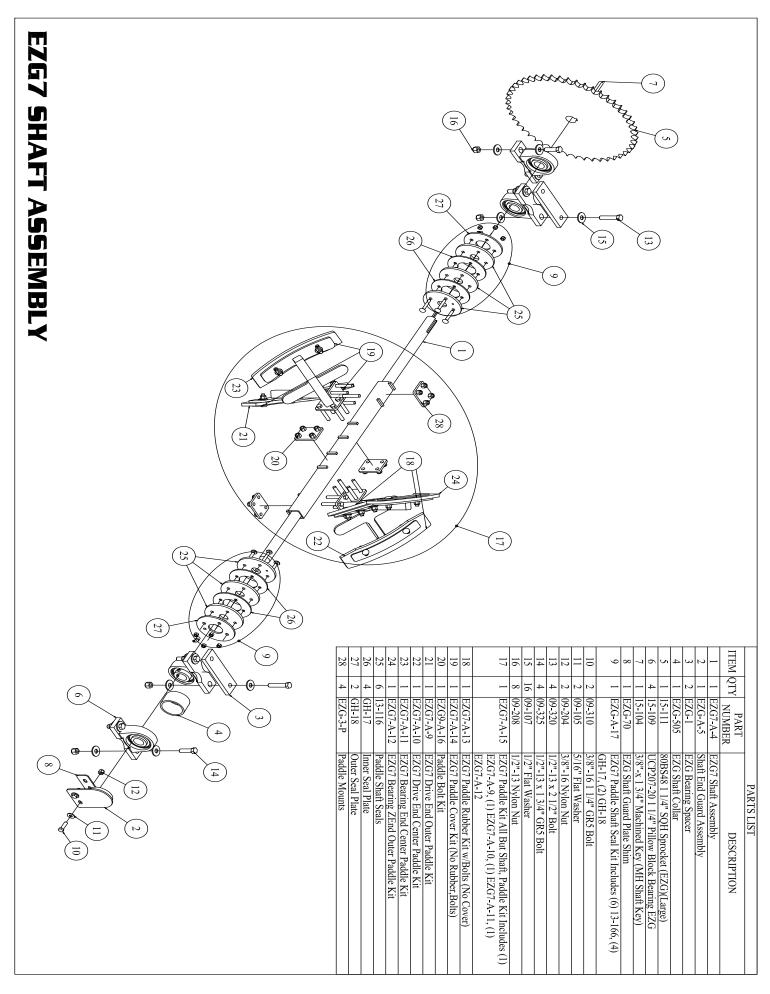

EZG Manufacturing 1-800-417-9272 www.ezgmfg.com Revision Number-003 04-25-2017- Present

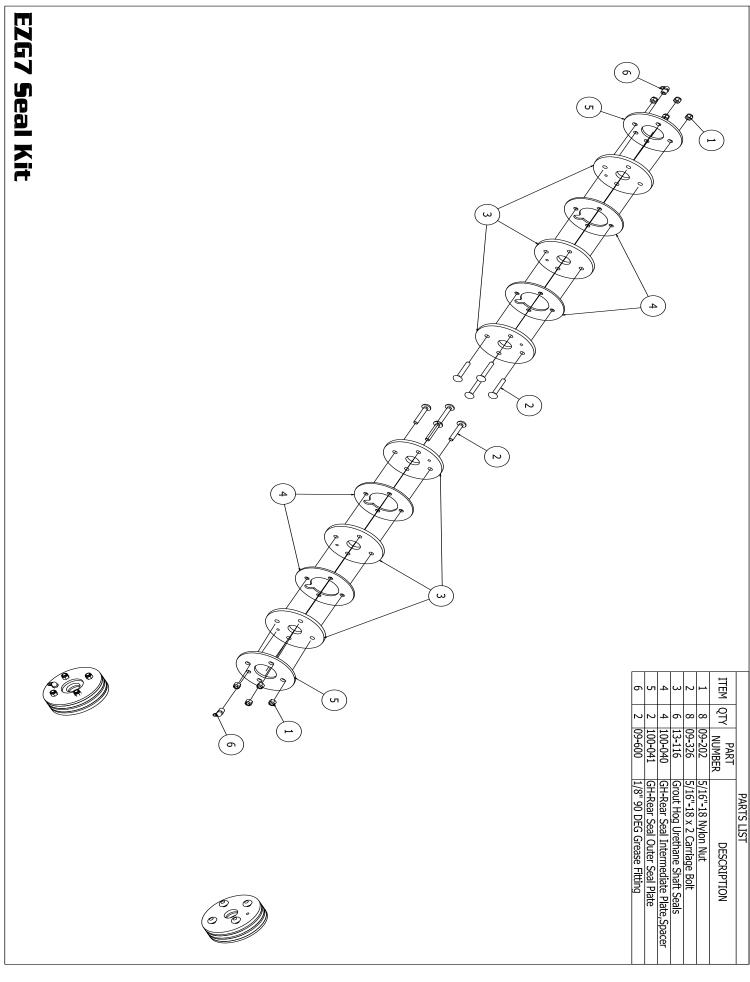

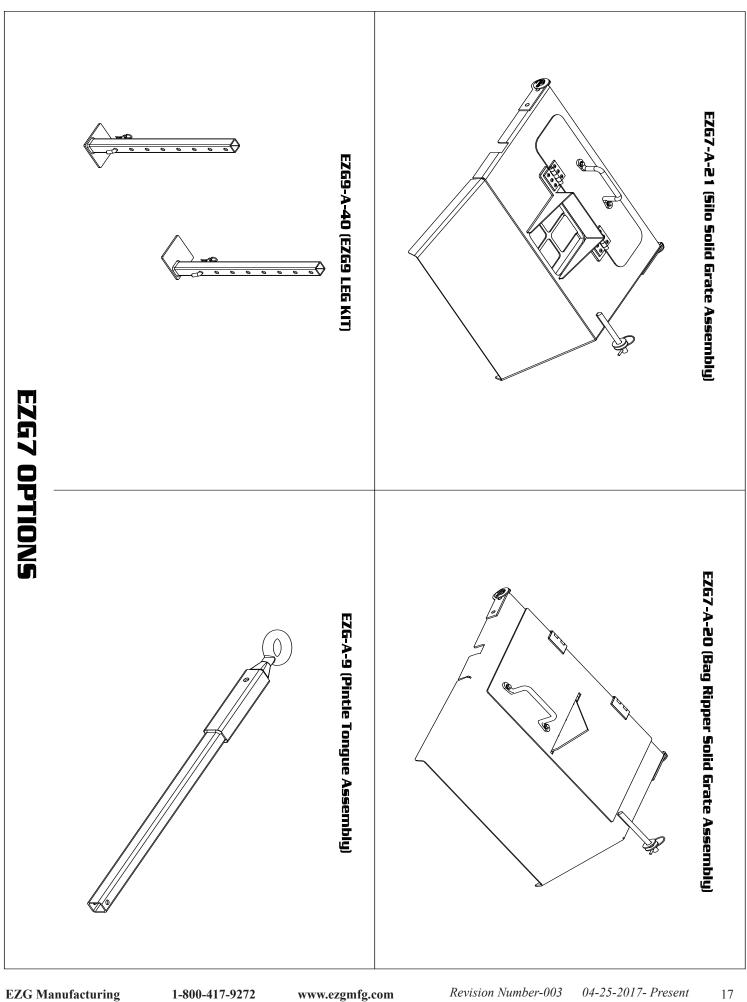

Revision Number-003 04-25-2017- Present 1-800-417-9272 www.ezgmfg.com

# **NOTES**


# WARRANTY

### **Limited Warranty**

The manufacturer warrants that products manufactured shall be free from defects in material and workmanship that develop under normal use for a period of one year on all products from the date of shipment. The foregoing shall be the exclusive remedy of the buyer and the exclusive liability of the manufacturer. Our warranty excludes normal replaceable wear items, i.e. gaskets, wear parts, seals, O-rings, belts, drive chains, clutches, etc. Any equipment, part or product which is furnished by the manufacturer but manufactured by another, bears only the warranty given by such other manufacturer. (Manufacturer agrees to furnish free of charge a written description of problem or cause.) Warranty is voided by product abuse, alterations, use of equipment in applications for which it was not intended, use of non-manufacturer parts, or failure to follow documented service instructions. The foregoing warranty is exclusive of all other warranties whether written or oral, expressed or implied. No warranty of merchantability or fitness for a particular purpose shall apply. The agents, dealers, and employees of Manufacturer are not authorized to make modifications to this warranty, or additional warranties binding on the Manufacturer. Therefore, additional statements, whether oral or written, do not constitute warranty and should not be relied upon.

The Manufacturer's sole responsibility for any breach of the foregoing warranty provisions, with respect to any product or part not conforming to the Warranty or the description herein contained, is at its option (a) to repair, replace, or refund such product or parts upon the prepaid return there of to location designated specifically by the Manufacturer. Product returns not shipped prepaid will be refused (b) as an alternative to the foregoing modes of settlementthe Manufacturer's dealer may repair defective units with reimbursement for expenses. A written description of problem or cause must accompany all warranty claims.

Except as set forth here in above and without limitation of the above, there are no warranties or other affirmation which extend beyond the description of the products on the fact here of, or as to operational efficiency, product reliability, or maintainability or compatibility with products furnished by others. In no event, whether as a result of breach of contract or warranty or alleged negligence, shall the Manufacturer, be liable for special or consequential damages including but not limited to: Loss of profits or revenue, loss of use of the product or any associated product, cost of capital, cost of substitute products, facilities or services or claims of customers. Manufacturer does not assume responsibility for any accident due to equipment modification.

No claim will be allowed for products lost or damaged in transit. Such claims should be filed with the carrier within fifteen days.

Effective July 20, 2005

EZG Manufacturing is the exclusive manufacturer of the patented Grout Hog® Grout Delivery System the Mud Hog® Hydraulic Mixing Station, the Hog Trough® mud pan, the Hog Cart™, the Hog Slopper™, the Booger Hog® Wall Scrubber, the Hog Leg® Wall Brace System, and the Hog Crusher<sup>TM</sup> Material Recycling System.

Fax Warranty Registration form to 740-962-2037 or submit online at www.ezgmfg.com by clicking on "Products" then "Warranty Cards".

# **WARRANTY REGISTRATION**

CONTACT:	
COMPANY:	
ADDRESS:	
CITY:	STATE: ZIP:
TEL: () FAX: ()	CELL: ()
EMAIL:	
PURCHASED FROM:   Direct   Distributor:	
PURCHASE DATE: SERIAL NO.	
PLEASE COMPLETE THIS WARRANTY CARD, AN WITHIN 30 DAYS OF PURCHASE TO VALIDATE FOR ALL EZG MANUFACTU WARRANTY PROVISIONS OF THIS MACHINE THE MANUFAC	YOUR MANUFACTURER'S WARRANTY IRING PRODUCTS. ARE HANDLED DIRECTLY THROUGH
EZG MANUFACTURING * 1833 North Riv	verview Road, Malta, OH 43758 *
PHONE 1-800-417-9272 * Email: warranty	@ezgmfg.com * FAX 740-962-2037
Please take a minute to fill out the survey below	so that we can better serve our customers
EZ Sur	vey
1. WHERE DID YOU FIRST HEAR ABOUT EZG MA  ☐ Masonry Magazine ☐ Website ☐ Newslett ☐ Other:	er 🛘 Referral 🗘 Masonry Construction
2. WHAT INFLUENCED YOU TO BUY? QUALIT	
3. WHO IS YOUR SALES REPRESENTATIVE?	
4. ARE YOU SATISFIED WITH THE CUSTOMER S  Explain:	ERVICE YOU RECEIVED?
5. WHAT OTHER EZG MANUFACTURING PRODU	CTS DO YOU OWN?
6. WOULD YOU LIKE TO BE FEATURED IN OUR I	
Comments:	